



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

WATER CAPTOR

FEATURES

- REPLACEABLE CARTRIDGE
- HIGH EFFICIENCY
- SMALL SIZE

The PIUSI WATER CAPTOR is a filter that absorbs any residual water particles that may be present in the fluid. The innovative cartridge needs to be replaced when filtering capacity is reduced due to the amount of water particles already absorbed. Available both for 70 or 150 l/min flow rates, these filters are also available with 1" inch fitting.

PERFORMANCE

UP TO

150 L/MIN

FLOW RATE

3,5 BAR

MAX

OPERATING PRESSURE

200β/30μ

FILTERING CAPACITY



WATER CAPTOR 150 L/MIN



PACKAGING

CODE	WEIGHT	PACKAGING		
	KG	DIMENSIONS MM	CARTRIDGE PSC / BOX	FILTER HEAD PCS/BOX
WATER CAPTOR				
FOO611A0A	2,4	390X285X140	2	1
FOO611A1A	2,3	390X285X140	1	1
WATER CAPTOR CARTRIDGE				
FOO611O1B	9,8	420X320X250	12	-
FOO611O2A	9,7	350X350X360	6	-
WATER CAPTOR FILTER HEAD				
F14640000	-	357X357X275	-	1
F15743000	0,9	200X120X240	-	1



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI



ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN

PRODUCTS



**150 L/MIN WATER CAPTOR
WITH WATER ABSORPTION**



**70 L/MIN WATER CAPTOR
WITH WATER ABSORPTION**

IN THE BOX

- FILTER HEAD
- WATER CAPTOR CARTRIDGE

DETAILS




FILTER HEAD



WATER CAPTOR CARTRIDGE

DIMENSIONS

CODE	A (MM)	B (MM)	C (MM)	D (MM)	F
FOO611AOA	-	100	280	95	-
FOO611A1A	-	171	340	120	-
FOO611O1B	220	-	-	95	1"-12 UNF
FOO611O2A	275	-	-	120	1 1/2"-16 UNF
F14640000	-	100	-	-	1"-12 UNF
F15743000	-	171	-	-	1 1/2"-16 UNF 1 1/4" BSP

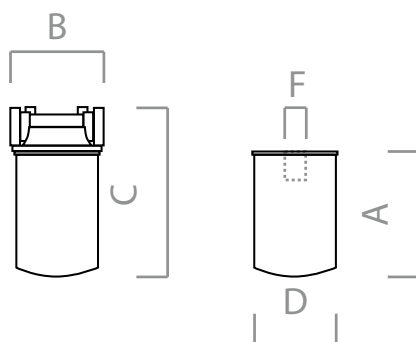













MATERIALS

- FILTER: ABSORBENT FILTERING PAPER

Dimensions expressed in millimeters

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		INLET / OUTLET BSP	WATER ABSORBING	EFFICIENCY	MICRO	PRESSURE
			L/MIN	GPM			β	μ m	BAR
WATER CAPTOR									
FOO611AOA	WATER CAPTOR FILTER 70L/MIN - 2 CARTD IT	 	70	18,5	1"	YES	200	30	3,5
FOO611A1A	WATER CAPTOR FILTER 150 L/MIN 1 CART IT	 	150	39,6	1"	YES	200	30	3,5
WATER CAPTOR CARTRIDGE									
FOO611O1B	WATER CAPTOR CARTD. 70 L/MIN (12PCS) IT	 	70	18,5	-	YES	200	30	3,5
FOO611O2A	WATER CAPTOR CART. 150 L/MIN (6PCS) IT	 	150	39,6	-	YES	200	30	3,5
WATER CAPTOR FILTER HEAD									
F14640000	FILTER HEAD UNF 70 L/MIN	 	-	-	1"	NO	-	-	-
F15743000	FILTER HEAD 70/100LT	 	-	-	1"	NO	-	-	-